



(2) 外置柱存在時





■	■	■	■
■	■	■	■
■	■	■	■
■	■	■	■
■	■	■	■
■	■	■	■
■	■	■	■
■	■	■	■
■	■	■	■
■	■	■	■
■	■	■	■
■	■	■	■

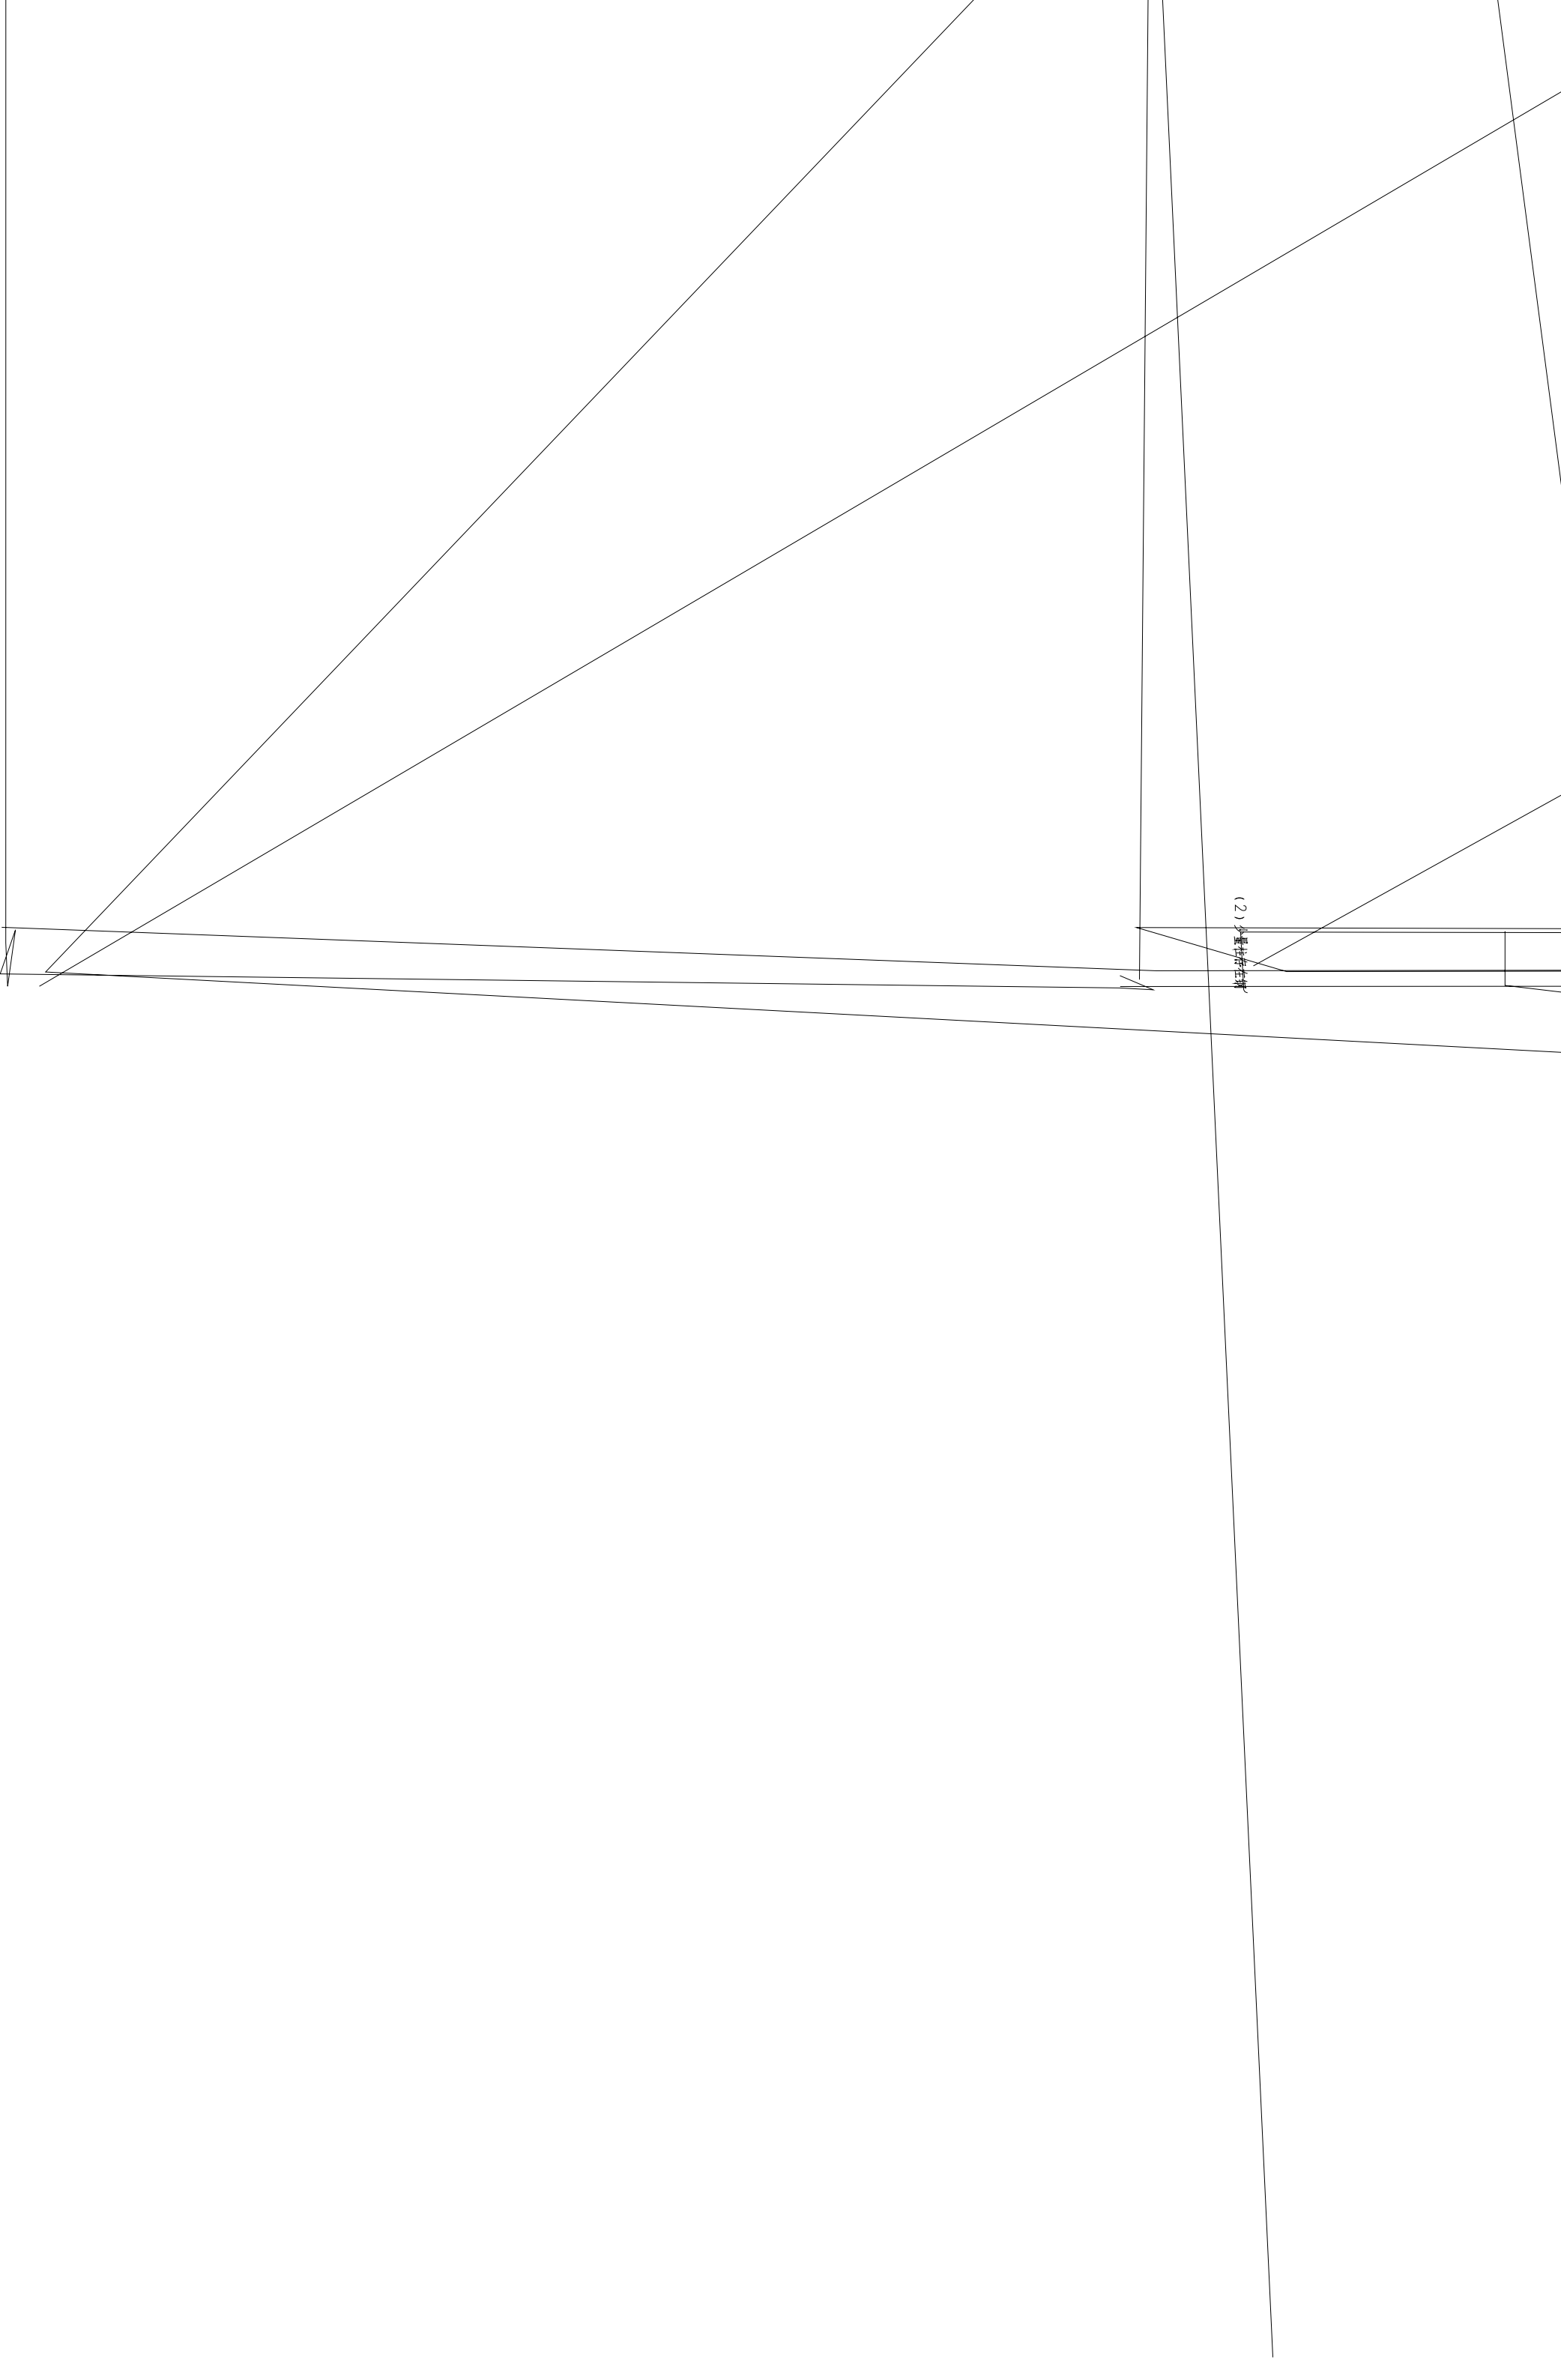

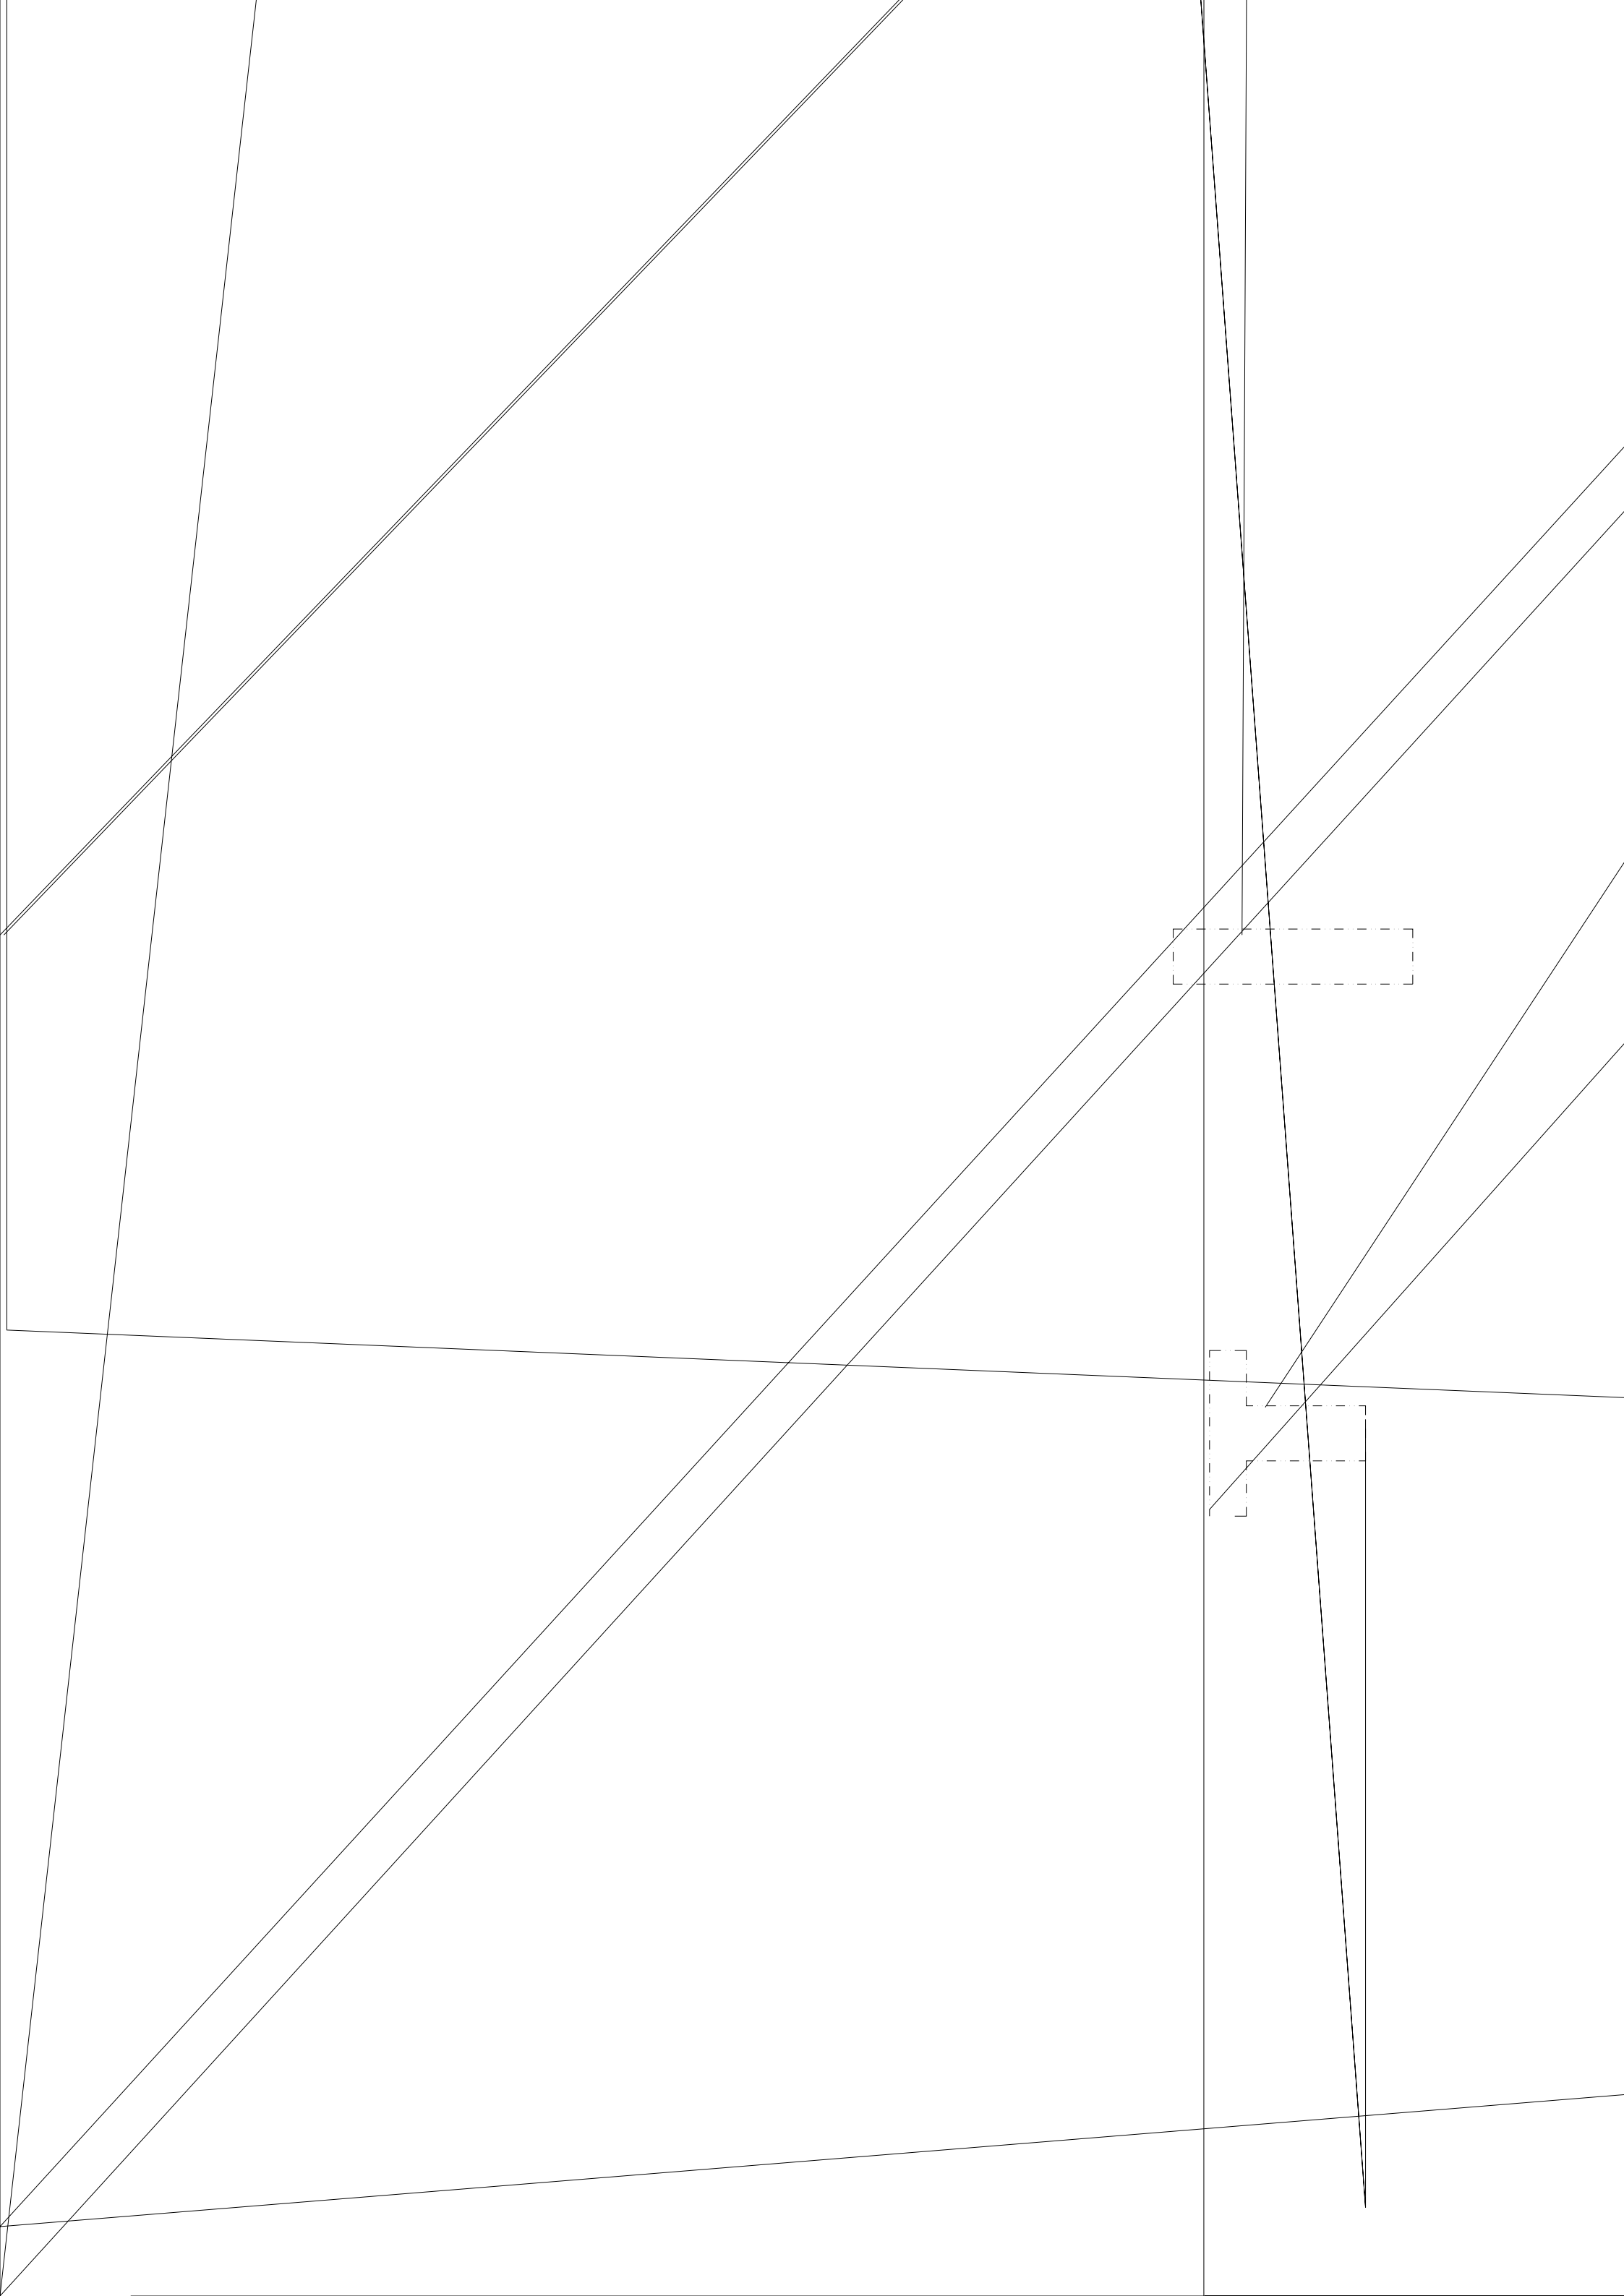

纵向角钢 4L75x6
后薄翼料

2M16@500
对穿角钢

横杆角钢-50x4@300

纵向角钢 2L75x6
后薄翼料

横杆-50x4@300

梁区等代鋼筋φ16

梁区等代鋼筋φ16

175×6

(詳平面)

顶层节点大样

中间层节点大样

屋面梁面—2.800

植筋

2.当梁高 ≥ 800 时，梁区等代箍筋
当梁高 $801\sim 1000$ 时，梁上区代箍筋为二付。

Φ 12@40#

